


## Mâts cylindro-coniques

Hauteur	Diamètre en bas x épaisseur	Diamètre au sommet	Dimension de la porte	Distance entre sol et porte	Poids
(m)	(mm)	(mm)	(mm)	(mm)	"±"/(kg)
3	114 x 2.5	60/76	400 x 85	600	9
3	114 x 3.0	60/76	400 x 85	600	10
3	120 x 3.0	60/76	400 x 85	600	11
3.5	114 x 2.5	60/76	400 x 85	600	10
3,5	114 x 3.0	60/76	400 x 85	600	11
3,5	120 x 3.0	60/76	400 x 85	600	12
4	114 x 2.5	60/76	400 x 85	600	11
4	114 x 3.0	60/76	400 x 85	600	13
4	120 x 3.0	60/76	400 x 85	600	14
4	135 x 3.0	60/76	400 x 85	600	16
4	145 x 3.0	60/76	400 x 85	600	17
4.5	114 x 2.5	60/76	400 x 85	600	12
4,5	114 x 3.0	60/76	400 x 85	600	14
4,5	120 x 3.0	60/76	400 x 85	600	15
4,5	135 x 3.0	60/76	400 x 85	600	17
4,5	145 x 3.0	60/76	400 x 85	600	18
5	114 x 2.5	60/76	400 x 85	600	13
5	114 x 3.0	60/76	400 x 85	600	16
5	120 x 3.0	60/76	400 x 85	600	16
5	135 x 3.0	60/76	400 x 85	600	18
5	145 x 3.0	60/76	400 x 85	600	20
6	120 x 3.0	60/76	400 x 85	600	19
6	135 x 3.0	60/76	400 x 85	600	21
6	145 x 3.0	60/76	400 x 85	600	24
6	165 x 3.3	76	400 x 90	600	28
7.5	135 x 3.0	60/76	400 x 85	600	27
7,5	145 x 3.0	60/76	400 x 85	600	29
7,5	165 x 3.3	76	400 x 90	600	34
8	145 x 3.0	76	400 x 85	600	30
8	165 x 3.3	76	400 x 90	600	36
8	175 x 4.0	76	400 x 90	600	45
8	200 x 3.3	76	400 x 110	600	43
8	200 x 4.0	76	400 x 110	600	50
9	165 x 3.3	76	400 x 90	600	40
9	175 x 4.0	76	400 x 90	600	50
9	200 x 3.3	76	400 x 110	600	46
9	200 x 4.0	76	400 x 110	600	56
10	165 x 3.3	76	400 x 90	600	44
10	175 x 4.0	76	400 x 90	600	56
10	200 x 3.3	76	400 x 110	600	51
10	200 x 4.0	76	400 x 110	600	61
10	200 x 4.7	76	400 x 110	600	76
10	226 x 4.5	90	400 x 115	600	80
11	175 x 4.0	76	400 x 90	600	61
11	200 x 3.3	76	400 x 110	600	60
11	200 x 4.0	76	400 x 110	600	68
11	200 x 4.7	76	400 x 110	600	80
11	226 x 4.5	90	400 x 115	600	91
12	200 x 3.3	76	400 x 110	600	70
12	200 x 4.0	76	400 x 110	600	72
12	200 x 4.7	76	400 x 110	600	85
12	226 x 4.5	90	400 x 115	600	93

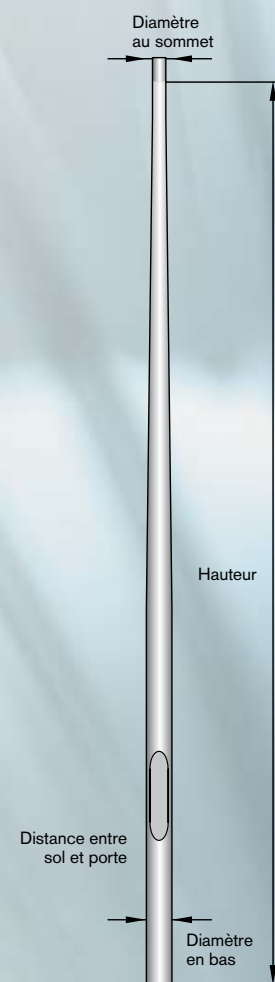

\* Pour d'autres dimensions nous consulter.