


Meist verwendeten konische aufsatzmast



LPH	Fußmaß X wanddicke	Artikel-nummer	Zopf maß	Lichtes Maß der Tür	Türhöhe Über Erdoberfläche	Erdstück länge	± mast- gewicht
(A)	(B)		(C)	(D)	(E)	(F)	(in Kg)
(in m)	(in mm)		(in mm)	(in mm)	(in mm)	(in mm)	(in Kg)
3	114 x 2.5	12.030.114.09	60	400 x 85	600	800	10.4
3	114 x 2.5	12.030.114.02V	60	400 x 85	600	800	10.4
3.5	114 x 2.5	12.035.114.01V	60	400 x 85	600	800	11.5
4	114 x 2.5	12.040.114.01V	60	400 x 85	600	800	12.7
4	114 x 2.5	12.040.114.05V	76	400 x 85	600	800	13
4	135 x 3.0	12.040.135.02	76	400 x 85	600	800	18.4
4.5	114 x 2.5	12.045.114.01	60	400 x 85	600	800	13.8
4.5	114 x 2.5	12.045.114.04V	76	400 x 85	600	800	14.1
5	120 x 3.0	12.050.120.11	60	400 x 85	600	800	18.6
5	135 x 3.0	12.050.135.02	76	400 x 85	600	800	21.6
6	120 x 3.0	12.060.120.08V	76	400 x 85	1000	1000	22.6
6	120 x 3.0	12.060.120.17	60	400 x 85	1000	1000	22.2
6	135 x 3.0	12.060.135.08	76	400 x 85	1000	1000	25.6
8	145 x 3.0	12.080.145.07	76	400 x 85	1000	1300	35.2
8	165 x 3.3	12.080.165.01	76	400 x 90	1000	1200	41.6
10	175 x 4.0	12.100.175.16	76	400 x 90	1000	1500	64.2
3	114 x 2.5	12.030.114.09	60	400 x 85	600	800	10.4
3	114 x 2.5	12.030.114.02V	60	400 x 85	600	800	10.4

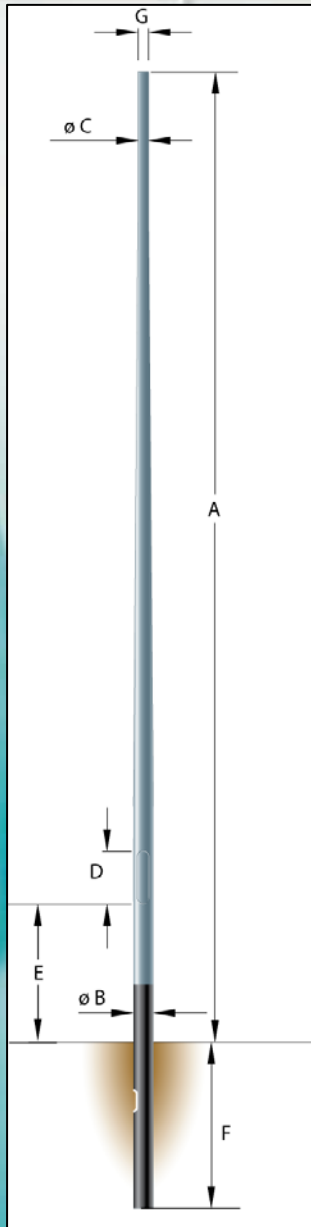